

Diesel Generator set 1100 series Engine P220-3 200KVA – 220 kVA 50 Hz



Description

This FG Wilson commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary Standby, Prime Power, and Continuous duty applications.

Features

FG Wilson engine - Rugged 4- cycle industrial diesel delivers reliable power, fuel optimized and fast response to load changes.

Permanent Magnet Generator (PMG) - Offers enhanced motor starting and fault clearing short circuit capability.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

Cooling system – Standard integral set-mounted radiator system, designed and tested for rated ambient temperatures, simplifies facility design requirements for rejected heat.

Control system - Standard DSE7410 electronic control provides total system integration including remote start/stop, precise frequency and voltage regulation, alarm and status message display, protection, output metering, auto-shutdown.

Enclosures - Optional weather-protective and sound-attenuated enclosures are available.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

circuit breaker - Optional 3 or 4 pole motorized circuit breaker available.

ISO 8528-5 – Refer to factory for site and configuration specific transient performance classification

Generator set specifications

Output Ratings

	Prime	Standby
400/230V, 50Hz	200 KVA	220 KVA
	160 KW	176 KW

Performance class	Genset models have been tested in accordance with ISO 8528-5.
Voltage regulation, no load to full load	± 0.5 %
Electromagnetic Compatibility Performance	Fuel optimized

Engine specifications

Ratings and Performance Data

Engine Make	Perkins	
Engine Model	1106A-70TAG4	
Alternator Make	FG Wilson	
Alternator Model	FGL30120	
Control Panel	DSE7410	
Base Frame	Heavy Duty Fabricated Steel	
Circuit Breaker Type	3 Pole MCCB	
Frequency	50 HZ	
Engine Speed: RPM	rpm	1500
Fuel Tank Capacity:	liters (US gal)	394 (104.08)

Engine Technical Data

No. of Cylinders	6	
Alignment	IN LINE	
Cycle	4 STROKE	
Bore	mm (in)	105 (4.1)
Stroke	mm (in)	135 (5.3)
Induction	TURBOCHARGED AIR TO AIR CHARGE COOLED	
Cooling Method	WATER	
Governing Type	ELECTRONIC	
Governing Class	ISO 8528 G2	
Compression Ratio	16.0:1	
Displacement	L (cu. in)	7 (427.8)
Moment of Inertia:	kg m ² (lb/in ²)	1.26 (4306)
Voltage	12	
Ground	Negative	
Battery Charger	85	
Engine Weight Dry	kg (lb)	788 (1737)
Engine Weight Wet	kg (lb)	822 (1812)

Engine Performance Data

Engine Speed	rpm	1500
Gross Engine Power Prime	kW (hp)	178.9 (240)
Gross Engine Power Standby	kW (hp)	196.3 (263)
BMEP Prime	kPa (psi)	2041 (296)
BMEP Standby	kPa (psi)	2239 (324.7)

Fuel system

Injection components

Injector Mechanical
 Fuel pump..... DP210

Fuel priming

Priming pump typeManual
 Maximum priming time..... 90 seconds

Fuel Filter	Replaceable Element			
Recommendation fuel	Class A2 Diesel			
Ful Consumption at	110%	100%	75%	50%
50 Hz Prime l/hr.	49	45.1	34.6	23.3
50 Hz standby l/hr.	-	49	37.8	25.6

Cooling system

Overall weight (wet)70 kg
 Overall face area.....524800 mm²
 Width.....724 mm
 Height..... 1090 mm

Radiator

Face area351200 mm²
 Number of rows and materials 4 rows, Aluminium
 Matrix density and material10 fins per inch, Aluminium
 Width of matrix.....439 mm
 Height of matrix.....800 mm
 Pressure cap setting (minimum) 100 kPa

Charge cooler

Face area173,600 mm²
 Number of rows and materials 2 rows, Aluminium
 Matrix density and material10 fins per inch, Aluminium
 Width of matrix 220 mm
 Height of matrix..... 789 mm

Fan

Diameter.....610 mm
 Drive ratio1.2:1
 Number of blades.....7
 Material.....Nylon
 Type..... Pusher
 Air flow @1500 rpm..... 282 m³/min
 Power @1500 rpm 5 kW

Coolant

Total system capacity..... 21 litres
 System drawdown capacity10%
 Engine capacity 9.5 litre
 Maximum top tank temperature110° C
 Temperature rise across engine
 (maximum rating dependent).....6° C - 12° C
 Maximum permissible external system resistance..... 35 kPa
 hermostat operation range 82° C to 93° C
 Shutdown switch setting118° C
 Coolant pump method of drive Gear
 Recommended coolant immersion heater rating (minimum)0.75 kW
 Recommended coolant BS6580 - 1992,ASTM D3306 and ELC coolants to 1E1966

		50
Cooling System Capacity	L (US gal)	27 (7.1)
Water Pump Type:		Centrifugal
Heat Rejected to Water & Lube Oil: Prime	kW (Btu/min)	78.2 (4447)
Heat Rejected to Water & Lube Oil: Standby	kW (Btu/min)	81 (4606)
Heat Radiation to Room*: Prime	kW (Btu/min)	24.5 (1393)
Heat Radiation to Room*: Standby	kW (Btu/min)	26 (1479)
Radiator Fan Load:	kW (hp)	5 (6.7)
Radiator Cooling Airflow:	m ³ /min (cfm)	307.2 (10849)
External Restriction to Cooling Airflow:	Pa (in H ₂ O)	125 (0.5)

*: Heat radiated from engine and Alternator
 Designed to operate in ambient conditions up to 50°C (122°F).

Air System (at 50 Hz)

Air Filter Type		Paper Element
Combustion Air flow Prime	m ³ /min	12.6
Combustion Air Flow Standby	m ³ /min	13.2
Max. Combustion Air Intake Restriction	kPa	5

Lubricating System

Oil Filter Type:		Spin-on, Full flow
Total Oil Capacity:	l (US gal)	16.5 (4.4)
Oil Pan Capacity:	l (US gal)	14.9 (3.9)
Oil Type:		API CI4 15W-40
Oil Cooling Method:		WATER

Exhaust system		
Maximum Allowable Back Pressure:	kPa (in Hg)	6 (1.8)
Exhaust Gas Flow: Prime	m ³ /min (cfm)	34.9 (1232)
Exhaust Gas Flow: Standby	m ³ /min (cfm)	36.8 (1300)
Exhaust Gas Temperature: Prime	°C (°F)	550 (1022)
Exhaust Gas Temperature: Standby	°C (°F)	550 (1022)

Alternator Physical Data

No. Of bearings	1
Insulation Class	H
Winding Pitch	2/3
Winding Code	6P/6S
Wiers	4
IP	IP23
Excitation System	Shunt
AVR Model	R120

Alternator Operating Data

Overseed	rpm	2250
Voltage Regulation (steady State)	%	± 0.5
Wave Form NEMA= TIF	%	50
Wave form=THF	%	2
Total Harmonic content LL/LN	%	2
Radio Interference		EN61000-6
Radiant Heat	KW	12.8


Alternator Performance Data

Voltage Code		415/240V	400/230V	380/220V
Motor Starting capability*	KVA	328	307	280
Short Circuit capacity**	%	270	270	270
Reactances	X _d	3.19	3.44	3.809
	X' _d	0.158	0.17	0.188
	X'' _d	0.102	0.102	0.113

*Based on 30% voltage dip at 0.4 power factor

** With optional independent excitation system (PMG / AUX winding)

Dimensions (Open Set)

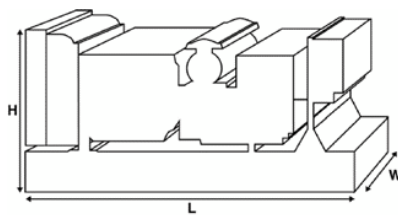

Length mm	2510
Width mm	1010
Height mm	1640

Control Panel Specification Data

DSE 7410



Key Features

- Configurable power-up mode
- MPU fail delay
- Enhanced graphical user interface
- Drag & drop advanced PLC editor
- MSC ID within PLC GenComm override
- 4-Line back-lit LCD text display
- Five key menu navigation
- Front panel editing with PIN protection
- 11 configurable inputs
- 8 configurable outputs
- Flexible sensor inputs
- 3 Configurable timers and alarms
- Configurable event log (250)
- Integral PLC editor
- CAN and Magnetic Pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- kW protection
- Reverse power (kW) protection
- Power monitoring (kW.h, kV Ar, kV A h, kV Ar h)
- Fully configurable via DSE Configuration Suite PC software

Key Benefits

- 132 x 64-pixel ratio display for clarity
- Real-time clock provides accurate event logging
- Set maintenance periods can be configured to maintain optimum engine performance
- Built-in-in-ethernet communications provides advanced remote monitoring
- Modules can be integrated into building management systems (BMS) using MODBUS
- increased input and output expansion capability via DSENet
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- Data logging to assist with fault finding
- PLC editor allows user configurable functions to meet specific application requirements
- License-free PC software

Specifications

- continuous voltage rating 8V to 35V continuous
- Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries
- Maximum operating current 260 mA at 12 V, 130 mA at 24 V
- charge fail 0 V to 35 V
- output A (fuel) 15A DC at supply voltage
- output B (start) 15A DC at supply voltage
- output C&D 8A DC at supply voltage
- Output E to J 2 A DC at supply voltage
- BUS 15V to 33V AC L-N
- MPU ± 0.5 to 70V

Codes or

standards compliance may not be available with all model configurations – consult factory for availability.

ISO 8528	This generator set has been designed to comply with ISO 8528 standards.
ISO 3046	This generator set performance and test methods comply with ISO 3046
BS 5000	This generator set comply with the British standards used for engine and generators
IEC 60034	This generator performance complies with the international standard for rotating electrical machines